

Egebant SanCut 181743

Colour- Coating	Gray
Colour- Liner	White Melange
Liner	Dyneema Diamond & Nylon
Coating	Polyurethane
Wrist type	Knit Wrist
Design	½ Gray PU Coated and Blue & White Knitted Liner and Cuff
Thickness	0,90 mm
Marking	Transfer print



Description

It is produced by coating thin Polyurethane (PU) on thin, light and durable Dyneema® Diamond fiber and Nylon mixture lining. Since glove liner contains no glass, metal or any other rough fiber, it gives you the best comfort, flexibility and protection at the same time. While providing TDM 100 B (6,3) level cut resistance according to ISO 13997 test, it does not compromise fingertip sensitivity. Compared to bare hand, it makes it very easy to hold dry and lightly greasy parts.


Applications: Metal parts assembly, metal machining, sheet metal applications, large part assemblies, thin plastic part assemblies

Dimensions

Size Range	Size 6 (XS)	Size 7 (S)	Size 8 (M)	Size 9 (L)	Size 10 (XL)	Size 11 (XXL)
Total Glove Length (a) (mm)	231	242	246	252	260	277
Hand Length (b) (mm)	174	197	198	199	214	219
Peripheral Length (c) (mm)	161	172	184	190	202	226
Over lock Colour	Brown	Red	Black	White	Blue	Burgundy
Glove Weight / 1 Pair (gram)	31	33	35	38	41	44

* Glove length (a) can vary ± 10 mm

* Glove width (c) can vary ± 3 mm

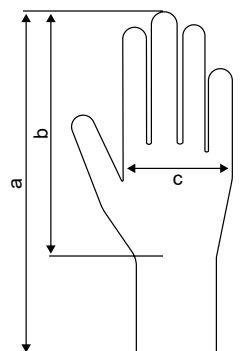

a = Glove Length
b = Hand Length
c = Peripheral Length

EN Test Results

Test	Notified Body / No	Results / Pass
EN 420: 2003 + A1: 2009	MNA (2841)	Yes
EN 388: 2016 + A1: 2018	MNA (2841)	4X42B

Typical Performance Values

EN 420 Dexterity	Level 5
EN 388: 2016 + A1: 2018 A. Abrasion Resistance	>8000 Cycles
EN 388: 2016 + A1: 2018 A. Blade Cut Resistance	6,3 N
EN 388: 2016 + A1: 2018 A. Tear Resistance	137,56 N
EN 388: 2016 + A1: 2018 A. Puncture Resistance	98,09 N

Special Features

Silicon Free	Pending
REACH Regulation	Meet Requirement
pH Values	Meet Requirement
Azo-colourants and PAHs	Meet Requirement
DMF Free	No

Packaging

Pairs per poly bag	10
Poly bags per carton	10
Carton count	100
Carton dimensions	600X260X180
Pallet dimensions	156X80X120

